

Control Rod Drive Shaft

Mechanical Latching/Unlatching Tool

Simplified latching and unlatching for easier operation and increased reliability

Challenge

Control rod drive shaft (CRDS) latching and unlatching is a critical path activity that occurs during every refueling outage. Recent industry operating experience has unveiled a significant flaw in the legacy CRDS tool leading to major outage delays, rework, and damage to plant components. The legacy CRDS tool is susceptible to pin failures, possibly leading to a foreign material intrusion (FMI) event. In addition to pin failures, the legacy tool utilizes pneumatic cylinders to perform the latching and button functions, which often fail. The lines fill with water or the button fingers start to slip and miss the button, resulting in tool maintenance during critical path. All of these failure mechanisms result in a high-risk, unreliable tool requiring frequent maintenance and refurbishment.

Solution

Introducing the new Framatome CRDS tool: simple, reliable, robust. The newly designed tool utilizes a patented rotational mechanical lock for the latching and unlatching functions. This eliminates the problematic small pneumatic cylinders and air lines found within the legacy tool. The Framatome CRDS tool also eliminates the pneumatic button cylinder, replacing it with a mechanical jack screw operated by a simple 120V power pack with an integrated slip clutch. This is the only non-pneumatic CRDS tool — there are no airlines, nitrogen bottles, valves, or manifold to run. This equates to a tool much easier and quicker to set up, and can be operated by a single technician. The mechanical latch actuation incorporates a two-stage positive lock to prevent inadvertent operation. The button up/down indicators are located at eye-level with the operator, easily seen by the technician and SRO. The tool is fully stainless steel, with an option for electro-polishing to further reduce contamination. It is substantially more robust than the legacy tool, resulting in worry-free transport. Furthermore, because the latching/unlatching process is still the same, the new Framatome CRDS tool can still be calibrated using the legacy calibration fixture.



Customer benefits


Increased Reliability

- No pneumatic cylinders or air lines to fail
- Not susceptible to pin failures leading to FMI
- Cannot slip on the button fingers

Simplified Operation & Reduced Dose

- Single reactor technician operation
- Reduced set-up time
- No nitrogen bottles or manifolds required
- Positive mechanical actuation with visual indications
- Utilizes current calibration fixture

Your performance
is **our** everyday **commitment**

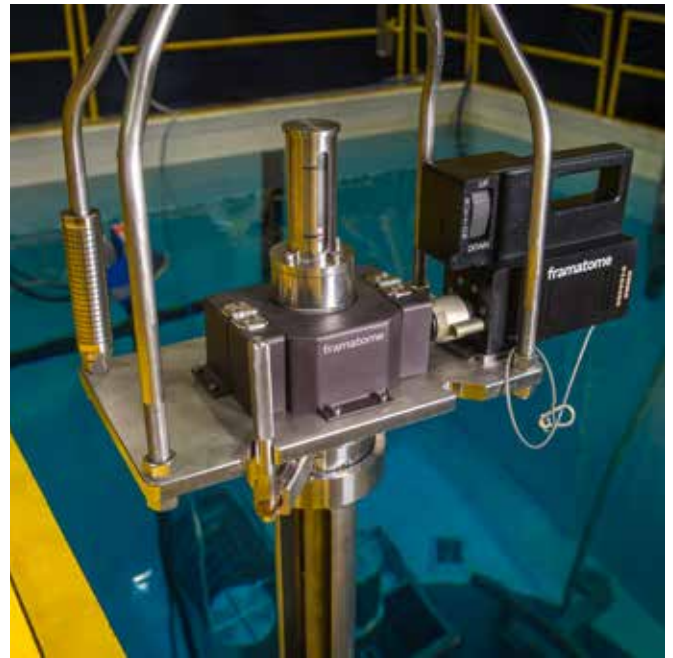

**The innovation is in
the simplicity**

Contact: outage@framatome.com
www.framatome.com

The data and information contained herein are provided solely for illustration and informational purposes and create no legal obligations by Framatome Inc. None of the information or data is intended by Framatome Inc. to be a representation or a warranty of any kind, expressed or implied, and Framatome Inc. assumes no liability for the use of or reliance on any information or data disclosed in this document. Photos by Warren Wright. ©2019 Framatome Inc. All rights reserved. PS_US_716_ENG_04-19

framatome