framatome

Material Testing

Qualified Determination of Material Property Values

The material testing laboratory helps resolving issues occurring in course of plant operation, and supports quality assurance in product manufacturing

Challenge

Properties of materials need to be tested when component problems are to be resolved, or in course of component manufacturing activities. Materials may need to be qualified, or previous material qualifications need to be validated or supplemented. In course of R&D activities, material properties may need to be tested.


Solution

Framatome's material testing laboratory provides a comprehensive set of services, from the preparation of material testing and sampling plans, to sample processing, testing and reporting, including acceptance certificates or independent experts.

Our experts perform various test procedures for determining the behavior and the material properties of standardized specimens or finished components under mechanical and thermal stress. The tests are carried out in conformance with respective standards. The results are documented in the form of test certificates or comprehensive work reports.

Our service portfolio:

- · Work preparation / CAD
- Handling of test specimen manufacturing
- · Optical and tactile measurement of samples and components
- Hardness tests, e.g., as per Vickers, Brinell, Rockwell
- · Tensile tests on standard and micro-specimens
- Compression tests
- Notched bar impact tests on standard, micro- and reconstituted specimens
- Bend tests
- Fracture mechanics tests and fatigue tests
- · Customer-specific component tests
- Acceptance certificates 3.1 (DIN EN 10204).

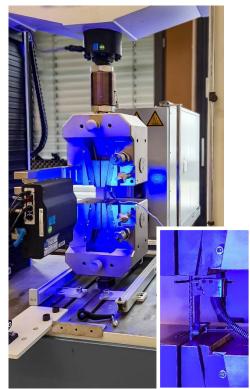

Mechanical materials testing in the laboratory

Customer benefits

- Obtain reliable results through our longstanding experience in the field of mechanical material testing and experimental fracture mechanics
- Rapid response times even for complex test setups
- High quality: your tests are carried out by qualified personnel

Your performance is our everyday commitment

Technical information

Testing equipment

Universal testing machines:

- Force measuring ranges: ± 250 N to ± 600 kN
- Vertical test space: max. 1600 mm
- Temperature range: -196 °C to 650 °C (higher temperatures upon request)

Resonance pulsators:

- Force measuring ranges: ± 250 N to ± 20 kN
- Dynamic travel range: ± 4 mm
- Frequency: 70 to 220 Hz
- · Oscillation mode: sinus

Servo-hydraulic testing machine:

- Force measuring ranges: ± 250 kN
- · Dynamic travel range: ± 50 mm
- Frequency: ≤ 70 Hz
- Oscillation mode: sinus, triangle, single ramp, sawtooth, rectangle, individual profile

Impact testing machines:

• 450 J (instrumented) for standard specimens

Hardness test equipment:

· Vickers, Brinell and Rockwell hardness testing machines


The Technical Center of Framatome Germany is a center of competence in the field of mechanical material testing and experimental fracture mechanics.

Our test labs are accredited according to DIN EN ISO/IEC 17025:2018 *)




*) the accreditation is valid only for the scope as listed in appendix of certificate D-PL-21039-03-00 and in list of test methods: https://www.dakks.de/de/akkreditierte-stellen-suche.html;

https://www.framatome.com/EN/customer-1668/certificates-and-accreditations.html

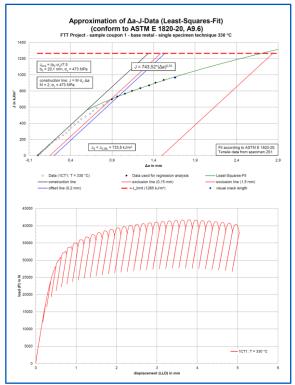

Methods for the determination of crack initiation values and crack resistance curves regarding stable crack expansion in the elastic-plastic fracture mechanics

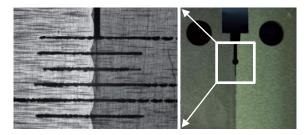

Fracture-mechanical specimen CT-25 with pre-fatigued crack

Key figures

Up to **500** tension test specimens, approximately **2000** charpy impact tests, approximately **600** fracture toughness tests are carried out on average per year in our test lab

Contact: materials@framatome.com www.framatome.com

It is prohibited to reproduce the present publication in its entirety or partially in whatever form without prior written consent. Legal action may be taken against any infringer and/or any person breaching the afore mentioned prohibitions.

Subject to change without notice, errors excepted. Illustrations may differ from the original. The statements and information contained in this publication are for advertising purposes only and do not constitute an offer of contract. They shall neither be construed as a guarantee of quality or durability, nor as warranties of merchantability or fitness for a particular purpose. All statements, even those pertaining to future events, are based on information available to us at the date of publication. Only the terms of individual contracts shall be authoritative for type, scope and characteristics of our products and services.

